Intellian[®] i9W

World's First & Only Global Satellite TV Service Reception 85cm Ku-band Marine Satellite Antenna



Global satellite services compatibility

Intellian i9W provides the ultimate convenience to connect you up to thousands of Free TV, Pay TV, Standard Definition, and High Definition programming all over the world with one LNB module which incorporates multi (8) LO frequencies.

Hands-free WorldView™ LNB module

The 2nd generation, patent-pending WorldView LNB module is the latest innovation from Intellian. Unlike other TVRO system LNB's with \pm 1,000 kHz stability, the Intellian WorldView LNB module is built on the highest stability of \pm 10 kHz which has 100 times more accuracy and greater signal sensitivity.

In addition, this LNB module receives multi-band and multi-polarization satellite TV services around the globe. Therefore, boaters don't need to manually change the LNB inside the antenna dome each time the vessel crosses into a different satellite service region.

DVB-S2 digital TV reception

Some of the HD TV services have moved onto DVB-S2 and will be more in the future. Thanks to Intellian's groundbreaking DVB-S2 digital TV technology, now boaters are able to enjoy their favorite DTH (Direct To Home) entertainment at sea, just like home.

Global satellite library

The i9W includes the pre-programmed global satellite library which allows boaters to select the desired satellite while travelling from region to region. Once the satellite is selected the WorldView LNB module will automatically switch to the corresponding local frequency to receive the signal.

Wireless connectivity & Aptus mobile

The built-in Wi-Fi enables the ACU to be wirelessly connected. PCs, laptops and smartphones can be used to connect to the ACU and monitor, control and change the settings of the system wirelessly. Intellian Aptus mobile is available for download to access to the ACU via Wi-Fi and operate the antenna from their iPhone, iPad or other network devices. iPhone and iPad are registered trademarks of Apple Inc.



Intellian[®] i9W

85cm Ku-band 2-axis

Marine Satellite Antenna Systems

I Technical Specifications

Dhusiaal

Physical				
Radome Height	121cm / 47.5"			
Radome Diameter	113cm / 44.5"			
Reflector Diameter	85cm / 33.5"			
Weight	56.2kg / 124lbs			
Environmental				
Operating Temp. Range	-25°C to +55°C / -13°F to +131°F			
Storage Temp. Range	-40°C to +80°C / -40°F to +176°F			
Water Ingress	IPX6			
Approvals	CE / FCC			
Warranty	3 years parts and 1 year labor			
Performance				
Reception Frequency	Ku-band (10.7~12.75GHz)			
Polarization	RHCP / LHCP, Vertical / Horizontal			
Minimum EIRP	44dBW			
Azimuth Range	680°			
Elevation Range	-15° to +90°			
Ship's Motion	Roll ±25°, Pitch ±15°			
Roll & Pitch Response Rate	30° / sec			
Turning Rate	30° / sec			
RF Output	Dual / Quad Output			

System Diagram

			LNB Output	RF1	RF2	RF3	RF4
			Dual	٠	٠	-	-
			Quad	•	•	•	•
	Antenna C E RF1 RF2 RF3	iontrol Unit (ACU)	RF	009/1 000/1 000/10	a O R a O R R	eceiver 1	
		RF4		ļ	000 000	α	
					*Receive	rs are not	t supplied

Antenna Control Unit				
Dimensions (WxDxH)	17.8cm x 21.7cm x 5.4cm / 7" x 8.5" x 2.1"			
Weight	1.2kg / 2.6lbs			
Display	2 line 20 Character VFD module			
GPS Interface	Built-in (NMEA 0183 GPS)			
Power Requirement	9.0~30.0V DC			
Power Consumption	Typ. 30W, Max. 50W			
LNB LO Frequencies				
Local Oscillator Frequency	Polarization	Area		
11.250 GHz	Dual Circular	North America, Russia		
10.500 GHz	Dual Circular	Latin America		
10.750 GHz	Single Circular	Korea		
10.750 GHz	Dual Circular	China		
10.678 GHz	Single Circular	Japan		
11.300 GHz	Dual Linear	South East Asia		
10.700 GHz	Dual Linear	Australia		
Universal	Quad Linear	Europe, Middle East, Africa, some Asia countries		


• LNB LO frequencies are automatically changed according to target satellites

· Polarization can be switched between circular and linear

Key Features

- Global Satellite TV Services Compatibility
- Built-in WorldView LNB Module
- DVB-S2 decode capability
- Built-in GPS and auto LNB pol control system
- Built-in pre-programmed global satellite library

Coverage Map

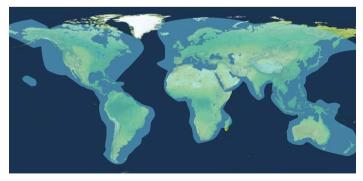



Global HQ Innovation Center / Factory Intellian Technologies, Inc T +82 31 379 1000 F +82 31 377 6185 APAC Seoul Office Intellian Technologies, Inc. T +82 2 511 2244 F +82 2 511 2235 Americas Irvine Office Intellian Technologies USA, Inc. T +1 949 727 4498 F +1 949 271 4183 Toll Free +1 888-201-9223 EMEA Rotterdam Office Intellian B.V. T +31 1 0820 8655 F +31 1 0820 8656

©2014 Intellian Technologies, Inc. All rights reserved. Intellian and the Intellian logo are registered trademarks. DBT, WRS, I3W and I-Series are trademarks of Intellian Technologies, Inc. in the U.S. and/or various countries. All other trademarks are the property of their respective owners. Information in this document is subject to change without notice. ISO9001 / ISO14001 Certified Intellian has more worldwide offices. Addresses, phone numbers, and fax numbers are listed on the Intellian Website at intelliantech.com