Intellian t110W

World's First & Only Global Satellite TV Service Reception 1.05m Stabilized Ku-band Marine Satellite Antenna







Global satellite services compatibility

Intellian t110W provides the ultimate convenience to connect you up to thousands of Free TV, Pay TV, Standard Definition, and High Definition programming all over the world with one LNB module which incorporates multi (8) LO frequencies.

DVB-S2 Digital TV reception

Some of the HD TV services have moved onto DVB-S2, and there will be more in the future. Thanks to Intellian's groundbreaking DVB-S2 digital TV technology, now boaters are able to enjoy their favorite DTH (Direct To Home) entertainment at sea, just like home.

I Hands-free WorldView™ LNB module

The 2nd generation, patent-pending WorldView LNB module is the latest innovation from Intellian. Unlike other TVRO system LNB's with $\pm 1,000$ kHz stability, the Intellian WorldView LNB module is built on the highest stability of ± 10 kHz which has 100 times more accuracy and greater signal sensitivity. In addition, this LNB module receives multi-band and multi-polarization satellite TV services around the globe. Therefore, boaters don't need to manually change the LNB inside the antenna dome each time the vessel crosses into a different satellite service region.

I Global satellite library

The t110W includes the pre-programmed global satellite library which allows boaters to select the desired satellite while travelling from region to region. Once the satellite is selected the WorldView LNB module will automatically switch to the corresponding local frequency to receive the signal.

I Dedicated management ethernet port

The Management Ethernet Port on the front of ACU enables direct and simple network connection between a PC and the ACU. The Management Port supports DHCP network connection by default, allowing automatic IP configurations and quick access to Intellian's remote management solution, Aptus Web.

Wireless connectivity

The built-in Wi-Fi enables the ACU to be wirelessly connected and can be either turned on and off by a switch. Any kind of wireless devices such as PCs, laptops and smartphones can be used to connect to the ACU and monitor, control and change the settings of the system wirelessly.




Intellian t110W

1.05m Ku-band 3-axis Marine Satellite Antenna Systems

I Technical Specifications

Physical			
Radome Height	142cm / 55.9"		
Radome Diameter	133cm / 52.4"		
Reflector Diameter	105cm / 41.3"		
Weight	91kg / 201lbs		
Environmental			
Operating Temp. Range	-25°C to +55°C / -13°F to +131°F		
Storage Temp. Range	-40°C to +80°C / -40°F to +176°F		
Water Ingress	IPX6	IPX6	
Approvals	CE / FCC		
Warranty	3 year parts and 1 year labor		
Performance			
Reception Frequency	Ku-band (10.7~12.75GHz)		
Polarization	Circular / Linear auto-switchable		
Minimum EIRP	42dBW		
Azimuth Range	680°		
Elevation Range	-15° to +120°		
Ship's Motion	Roll $\pm 25^{\circ}$, Pitch $\pm 15^{\circ}$, Yaw $\pm 8^{\circ}$ @ 6 sec period		
Turning Rate	Up to 12°/sec & 5°/sec ²		
RF Output	Quad Output		
Antenna Control Unit			
Dimensions (WxDxH)	43.1cm x 38cm x 4.4cm / 17" x 15" x 1.7"		
Weight	3.5kg / 7.7lbs		
Display	2 line 40 Character VFD module		
GPS Interface	Built-in (NMEA 0183 GPS)		
Power Requirement	100~240V AC, 50~60Hz, 2A		
Power Consumption	Typ.50W, Max. 100W		
LNB LO Frequencies			
Local Oscillator Frequency	Polarization	Area	
11.250 GHz	Dual Circular	North America, Russia	
10.500 GHz	Dual Circular	Latin America	
10.750 GHz	Single Circular	Korea	
10.750 GHz	Dual Circular	China	
10.678 GHz	Single Circular	Japan	
11.300 GHz	Dual Linear	South East Asia	
10.700 GHz	Dual Linear	Australia	
Universal Low: 9.75 GHz High: 10.6 GHz	Quad Linear	Europe, Middle East, Africa, some Asia countries	

System Diagram

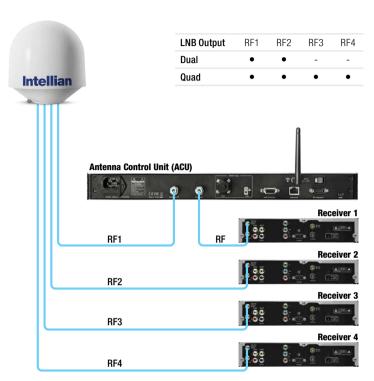

*Receivers are not supplied

Coverage Map



Global HQ Innovation Center/Factory Intellian Technologies,Inc

Note

Seoul Office Intellian Technologies, Inc.

• LNB LO frequencies are automatically changed according to target satellites

• LNB stability: ±10 kHz (Except at Universal 9.75 GHz)

· Polarization can be switched between circular and linear

LNB LO frequencies can be extended

Americas HQ Irvine Office Intellian Technologies USA, Inc. T +1 949 727 4498 F +1 949 271 4183 Toll Free +1 888-201-9223

South America Rio de Janeiro Office Intellian do Brasil Tecnologia Ltda.

T+55 21 3176 2048 **F**+55 21 9612 1431

EMEAHQ Rotterdam Office Intellian B.V. **T** +31 1 0820 8655 **F** +31 1 0820 8656

Southampton Office Intellian Ltd.

T +44 2380 019 021 **F** +44 2380 767 092

